

# FMT15104H, FMT15108H

151MHz Handheld Transmitter

## Features

- Portable, handheld 151MHz transmitter, easy to carry.
- Operates up to 800 metres.
- Uses standard 9-Volt battery.
- Includes pre-tuned antenna.
- Not affected by electrical interference, suitable for industrial applications where there is normally a high level of interference.
- Simultaneous channel transmission is possible; i.e. more than one channel can be activated at the same time.



## Application

- Pump Control
- Long distance panic button
- On/Off functions in agricultural and industrial devices
- Security alarms

## Description





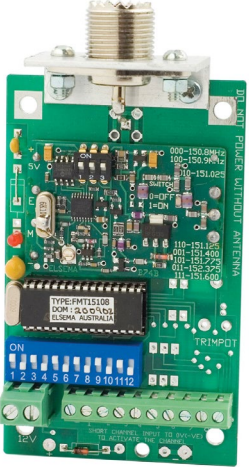


The FMT15104H and FMT15108H are handheld transmitters that has an operating range of up to 800 metres. With 100mW transmission power and only using 85mA during transmission makes it ideal for the standard 9 volt battery.

Each transmitter button is individually transmitted to the receiver making it possible to do simultaneous channel transmission. This means that up to 8 different functions can be done at the same time. Each button can operate any FMR151... series receivers making it possible to transmit each button to different single channel receivers or to multi channel receivers.

The transmitter uses a frequency of 151MHz and a modulation type of Narrow Band Width FM which makes it suitable for industrial applications where you would have a high level of electrical interference. This transmitter is not affected by man made or electrical interference.

The transmitter uses a specially programmed micro-controller which ensures the highest reliability, low standby current consumption (10uA) and greater flexibility. The greater flexibility allows customers to contact Elsema and request custom written software for special functions.

**Products in the Range**

|  |  |   |   |
|--|--|---|---|
|   |   |   |  |
| <p><b>FMT15101E – 1 channel</b></p>  | <p><b>FMT15102E – 2 channel</b></p>  | <p><b>FMT15104E – 4 channel</b></p>   | <p><b>FMT15108E – 8 channel</b></p>   |
|  |  |  |   |
| <p><b>FMT15108 – 1-8 channel (No Case version)</b></p>                             | <p><b>FMT15104H – 4 channel</b></p>  | <p><b>FMT15108H – 8 channel</b></p>   |   |

**Coding Instructions**

The 12 way dip switch on the transmitter sets the 12 bit unique code for the system. This has to be matched to the receivers 12-way dip switch.

**Operating Frequency**

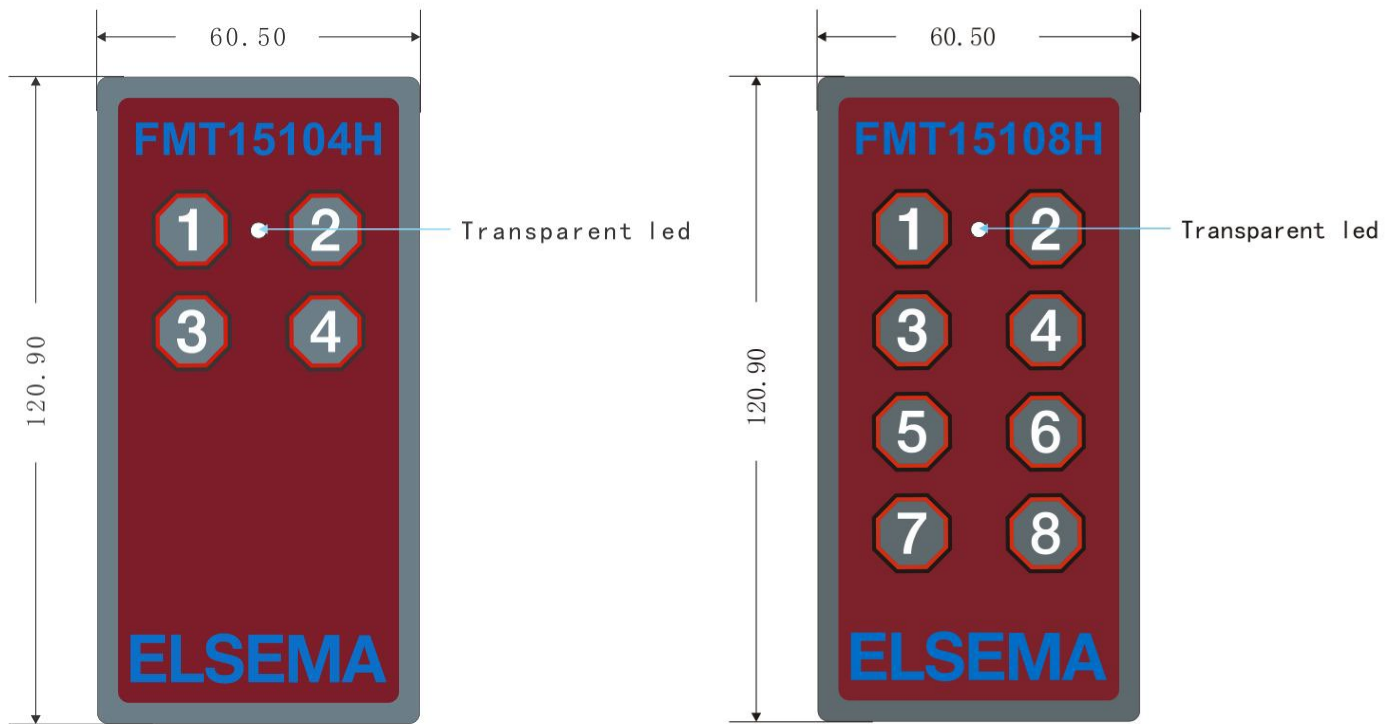
There are 7 selectable frequencies available. The black 3-way dipswitch changes the frequency. If two separate systems are installed in the same location it is recommended to set each system to a different frequency. The default setting is 151.600 MHz (All 3 dipswitches “ON”). Following is a table with the Dipswitch settings and the corresponding frequencies.



| Frequency   | 1   | 2   | 3   |
|-------------|-----|-----|-----|
| 151.600 MHz | On  | On  | On  |
| 152.375 MHz | Off | On  | On  |
| 151.775 MHz | On  | Off | On  |
| 151.400 MHz | Off | Off | On  |
| 151.175MHz  | On  | On  | Off |
| 151.025 MHz | Off | On  | Off |
| 150.900 MHz | On  | Off | Off |
| 150.825 MHz | Off | Off | Off |

**Technical Data**

|                             |  |
|-----------------------------|--|
| Power Supply                | 9-Volt Alkaline Battery. Part number 6LR61           |
| Current Consumption         | 85mA at 9VDC (Only when transmitting)                |
| Standby Current             | Less than 10uA.                                      |
| Operating Frequency         | 151.6MHz (8 selectable frequencies. See table above) |
| Operating Temperature Range | 0 - 50°C   |
| Digital Coding System       | On-board 12-way Code Switch                          |
| Antenna                     | 151MHz tuned antenna included with the transmitter   |
| Dimension                   | 130 x 67 x 27mm                                      |
| Weight                      | 60g  |
| Useable Operating Range     | Up to 800 metres, depending on installation          |
| Compatible Receivers        | All Elsema type FMR151... series                     |

**Label Dimensions**

Customers who wish to have their own membranes can contact us with their designs on (+61) 2 9609 4668

You can have your own company logo and specific text printed on the membranes. e.g. Up, Down, Right and Left or Start, Stop etc.

The minimum quantity for custom membranes is 50 pieces per order.

**Manufactured by**

**Elsema Pty Ltd**  
31 Tarlington Place, Smithfield  
NSW 2164, Australia.  
Ph: 02 9609 4668  
Website: <http://www.elsema.com>

**Distributed by**